

SPECIFICATION DATA SHEET

Resioak Hybrids is a quality Limestone Composite (SPC) flooring solution that offers exceptional performance within a value-driven range. Designed to meet the needs of residential spaces that require both lasting durability and aesthetic appeal, Resioak Hybrids combines reliable durability with a sophisticated finish.

Built with the trusted Uniclic locking system, Resioak Hybrids ensures straightforward installation and long-term usability, making it a great choice for both new builds and renovations.

The rigid core ensures stability in fluctuating indoor conditions. With a robust wear layer, Resioak Hybrids offers excellent resistance to everyday use, maintaining its appearance and functionality with ease.

Its TruEmbossed matte surface makes it easy to clean, ensuring long term convenience for busy households.

Product Details

Board Style	Plank
Board Thickness	8 mm
Board Size	1800 x 228 mm
Edge Profile	Micro Bevelled
Locking System	Uniclic
Installation Method	Floating only

Sqm/ Box	2.052 m ²
Pieces / Box	5
Box / Pallet	52
Weight / Box	26.7 kg

Suitable Application	Residential
-----------------------------	-------------

Performance & Safety Testing

Slip (AS 4586-2013)	P4 (SRV 45)
Fire (AS ISO 9239.1-2003)	9.9 kW/m ²
Acoustic Outcome	L'nTw 38
AAAC Rating	6 Star


Reports are available upon request.



Images are for general illustration only. Actual product colours may differ due to variations in screen displays or printing processes. The scale of the images does not reflect true colour variation. For an accurate representation, please refer to physical samples. Images are not legally binding.

Technical Summary

Top Wear Layer	0.3 mm
Water Resistance	Yes
Surface Finish	Matte
Wear Layer	UV Protect Anti-wear
Decorative Layer	TruEmbossed Wood Texture
Core Structure	Limestone Composite (SPC)
Backing Layer	2 mm IXPE Acoustic Underlay
Density	408 kg/m ²
Formaldehyde Test	Chamber value: 0.006 mg HCHO/m ³ of air
TVOC Range	PASS ≤0.5 mg/m ³
Environmental	Sourced from sustainable managed resources
Certificate of Compliance	Bureau Veritas - Best Environmental Practice PVC 2.0

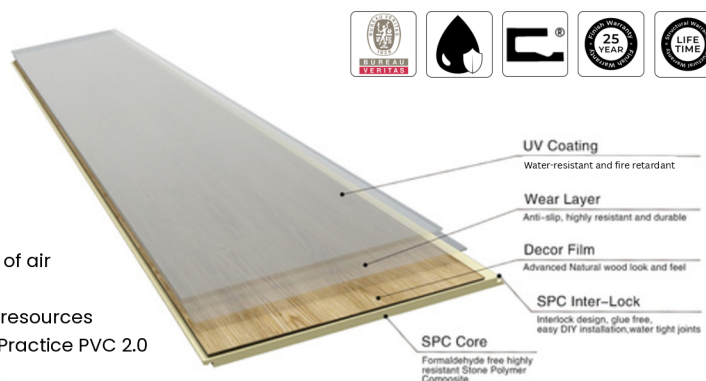

This specification data sheet has been prepared by National Select Floors. All information provided was accurate at the time of writing and publication. National Select Floors reserves the right to alter product details at any time without prior notification. Images included are for illustrative purposes only and do not confer any rights or guarantees.

National Select Floors recommends installation by a professional flooring contractor or skilled tradesperson and must follow the Australian Standards for flooring installations. All installations must also be performed in accordance with National Select Floors installation guidelines. If you have any concerns regarding the installation process, please contact your reseller.

Installation guidelines and Warranty information are available from our website.